

FIG. 1
(PRIOR ART)

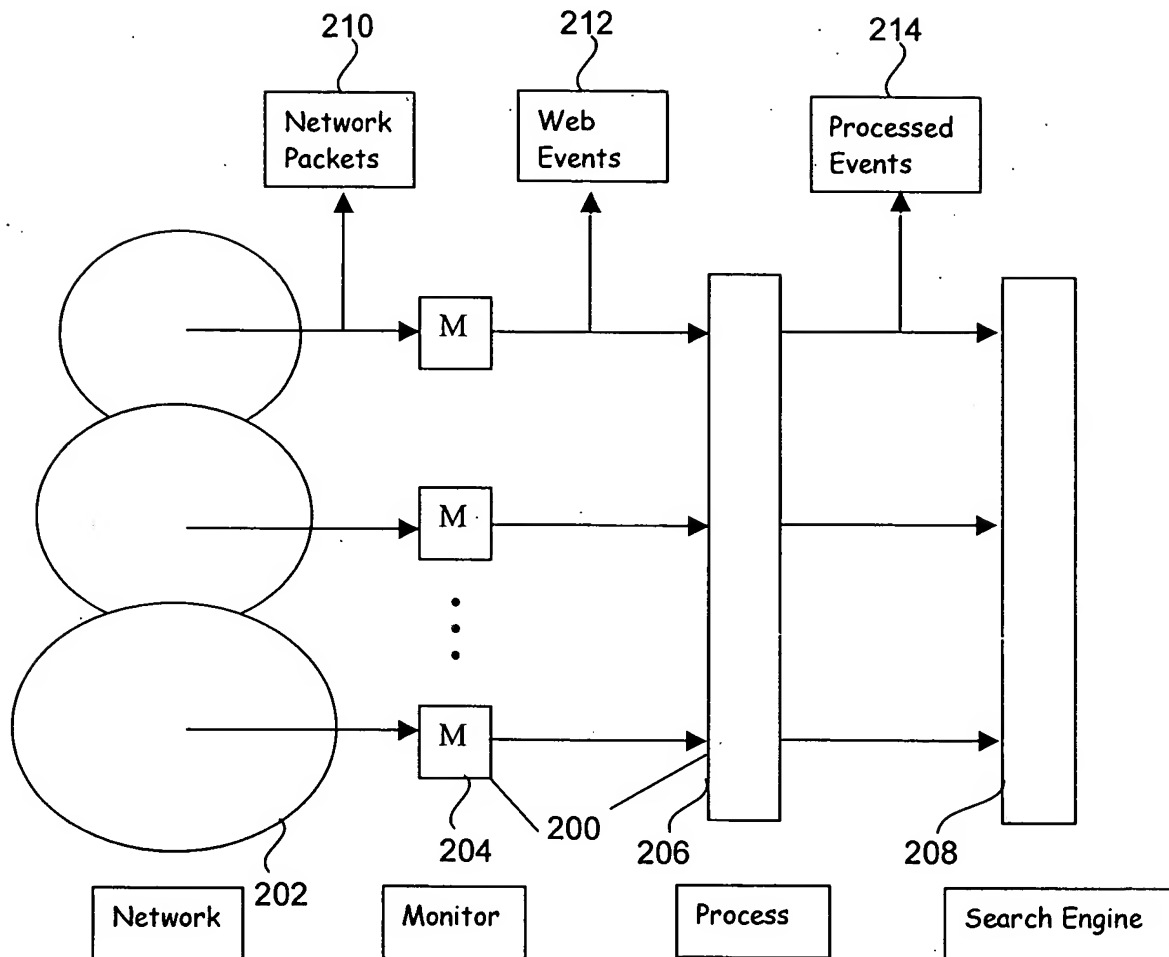


FIG. 2

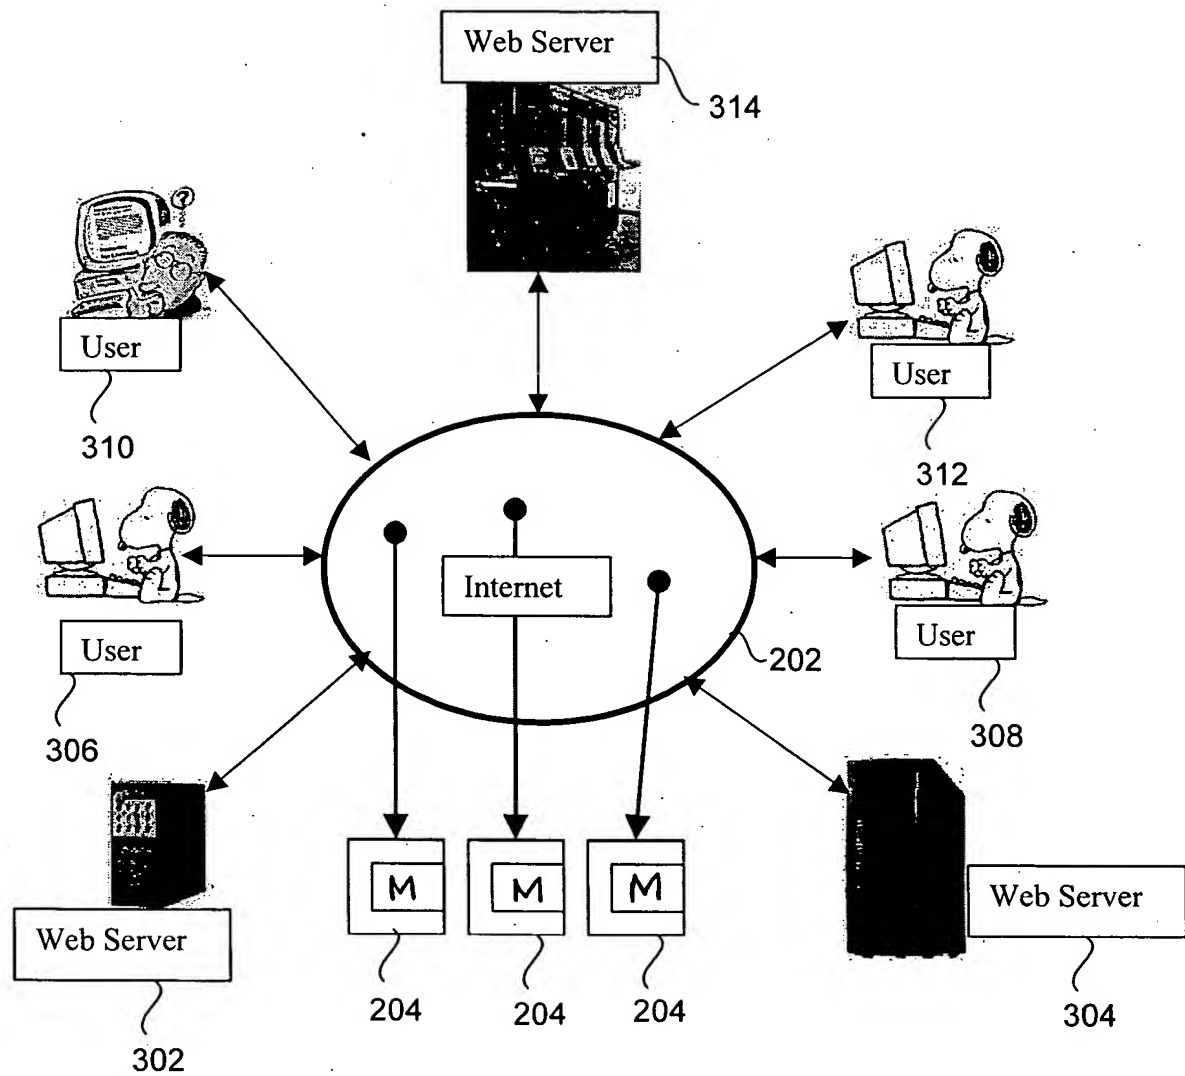


FIG. 3

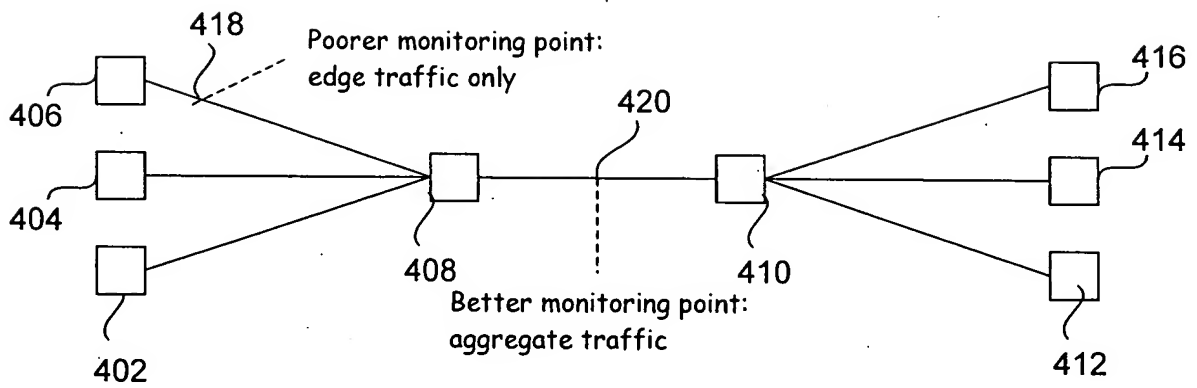


FIG. 4

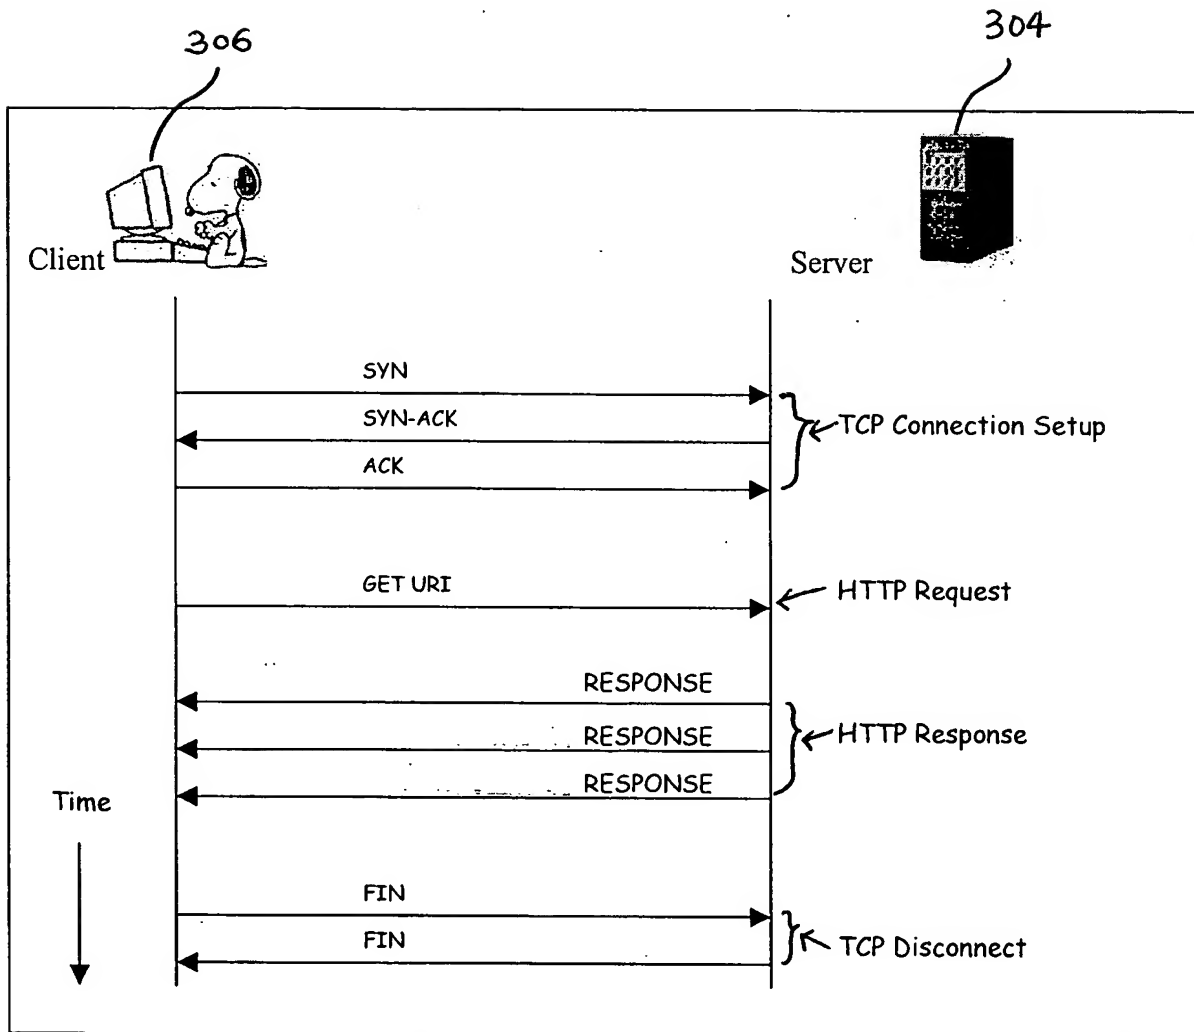


FIG. 5

4-bit version	4-bit header length	8-bit type of service (TOS)						16-bit total length (in bytes)				
16-bit identification								3-bit flags	13-bit fragment offset			
8-bit time to live (TTL)		8-bit protocol <u>602</u>						16-bit header checksum				
32-bit source IP address								<u>604</u>				
32-bit destination IP address								<u>606</u>				
Options (if any)												
16-bit source port number						16-bit destination port number <u>608</u>						
32-bit sequence number								<u>610</u>				
4-bit header length	6-bits (reserved)	U R G	A C K	P S H	R S T	S Y N	F I N	16-bit window size				
16-bit TCP checksum								16-bit urgent pointer				
Options (if any)												
Data												

614. 612 616

FIG. 6

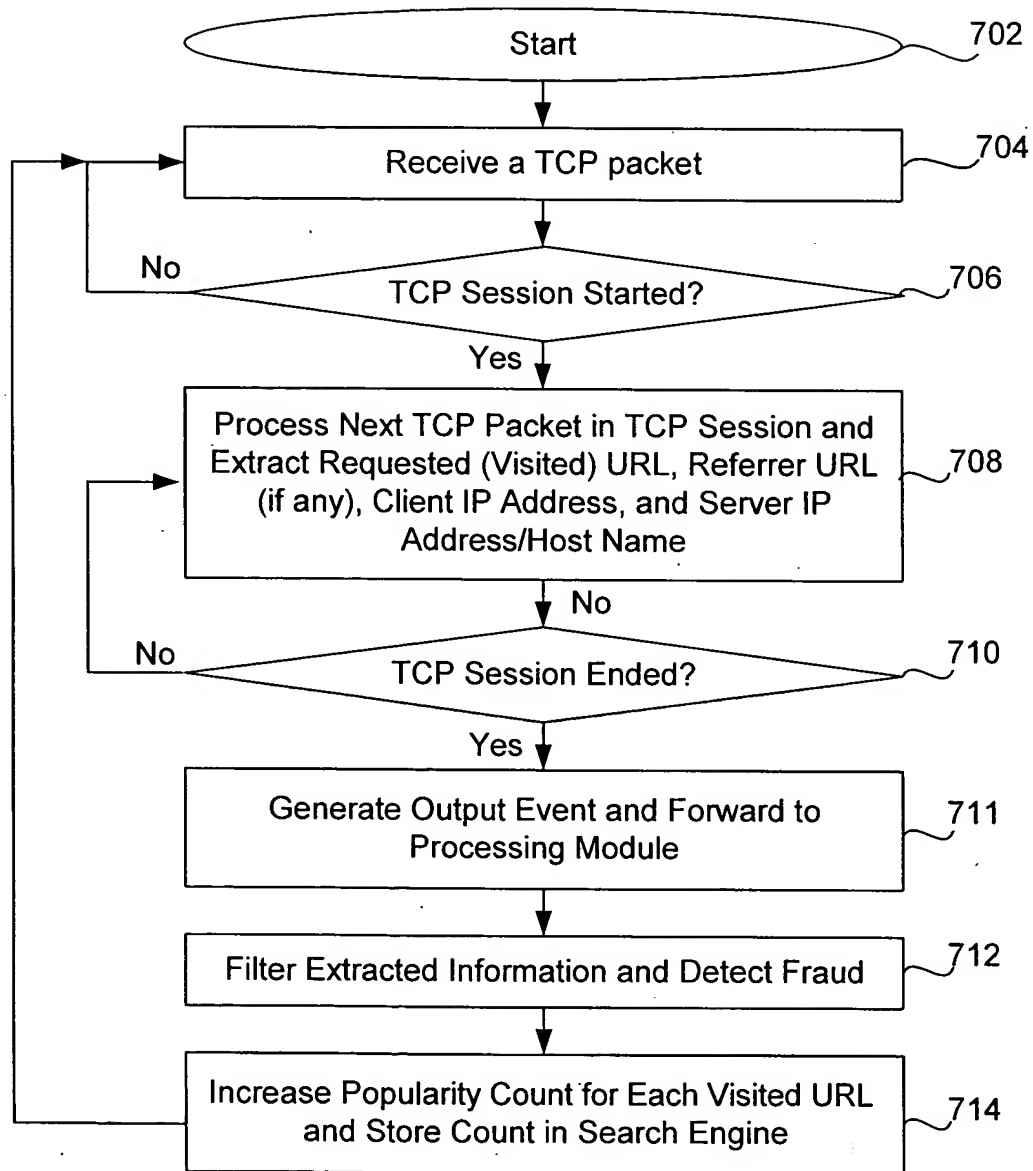


FIG. 7

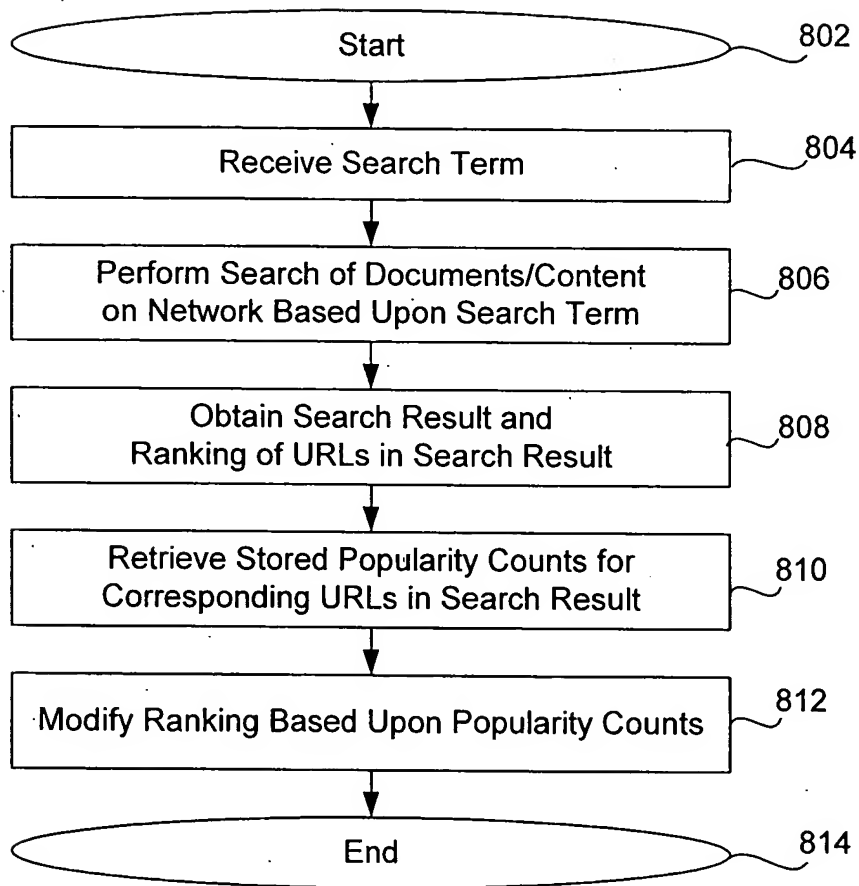


FIG. 8

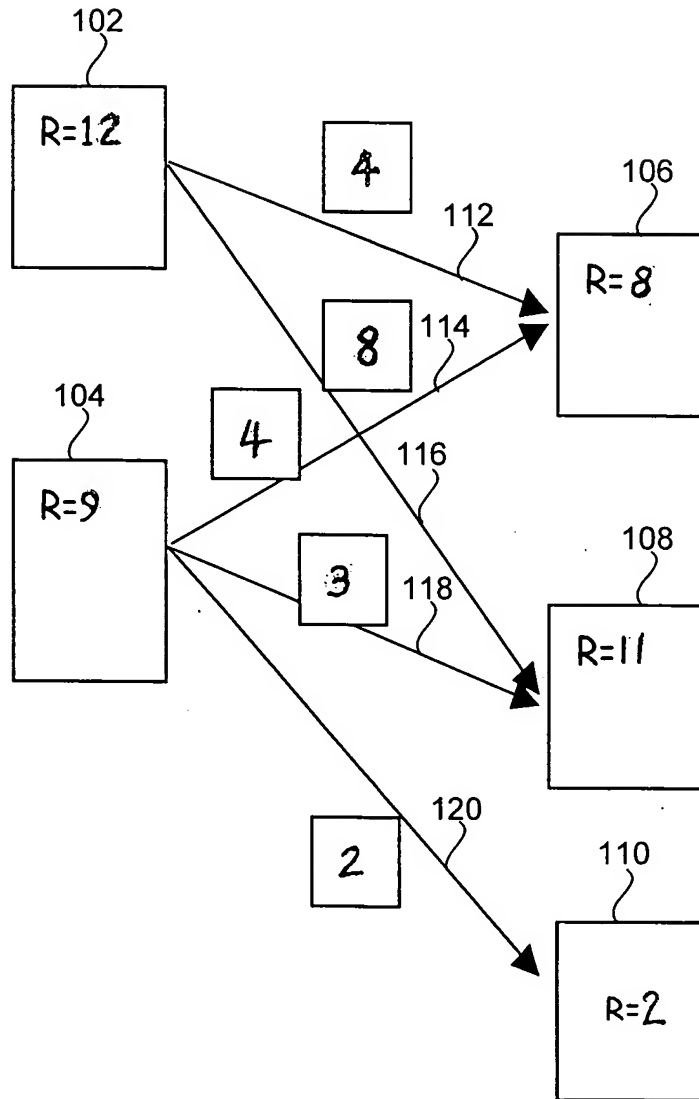


FIG. 9

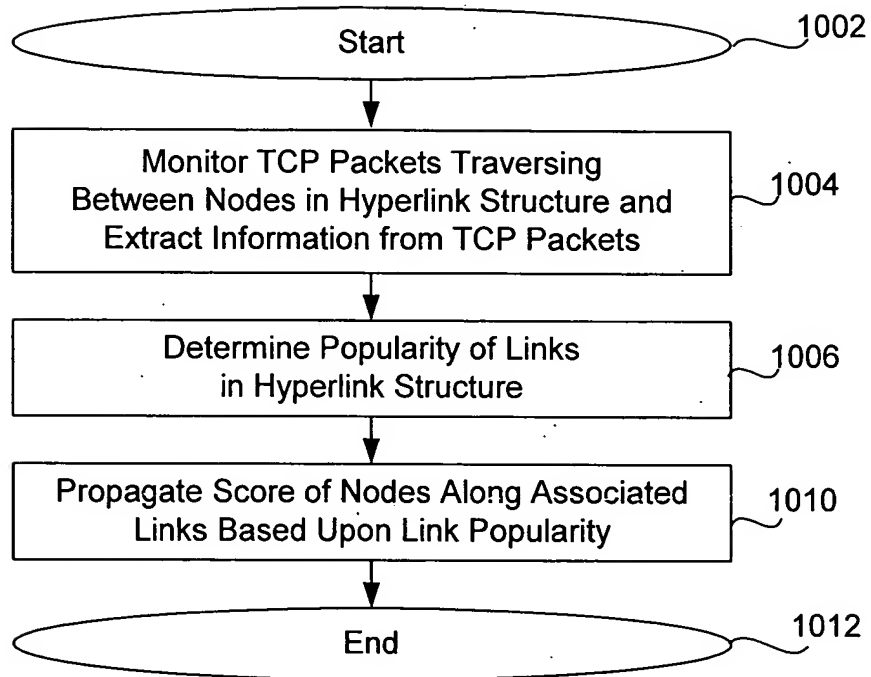


FIG. 10